



IMPORTADORA

CHIRIBOGA
& JARA S.A.

Urb. Sta Adriana Mz 3 SI 7, Av J.T. Marengo Km 5 1/2, Guayaquil-Ecuador


GYE: (593-4) 6005004 - (593-4) 6005005

GYE: (593-4) 3082583

www.chiribogayjara.com (http://chiribogayjara.com)



ACORA-SS

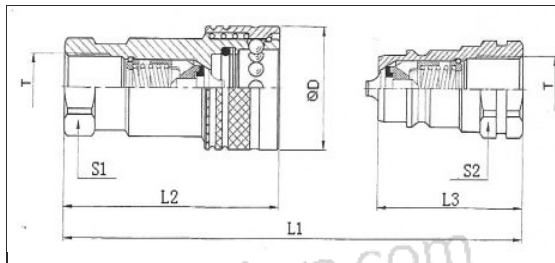

Materials: Body components in stainless steel 316

Valve: Poppet Type

Locking Ball: SS316

Inside Springs: SS304

Seals: Standard in Viton FKM.

Working temperature: With standard seals
-25°C+ 200°C

CH&J	ISO	L1	L2	L3	ØD	S1	S2	T
ACORA 3/8-S	10	85	61	43	31	22	22	3/8" NPT
ACORA 1/2-S	13	93	69	47	38	27	27	1/2" NPT
ACORA 3/4-S	20	115	85	58	46	34	34	3/4" NPT

ACORA-SS TECHNICAL DATA

Nominal size		Max.working pressure (bar)	Rated flow (l/m)	Min burst pressure			Fluid spillage (cc)
CH&J	ISO			Male (bar)	Female (bar)	Coupled (bar)	
ACORA 3/8-S	10	200	23	800	870	950	19
ACORA 1/2-S	13	175	45	720	910	1020	2.7
ACORA 3/4-S	20	125	106	550	680	810	9.3

ACCESORIES



CH&J	ISO	Female dust plug	Male dust cap	Colour	Material
ACORA 3/8-S	10	S54-3	S59-3	Red	Plastic
ACORA 1/2-S	13	S54-4	S59-4	Red	Plastic
ACORA 3/4-S	20	S54-6	S59-6	Red	Plastic