


MMM'CUILIDGE

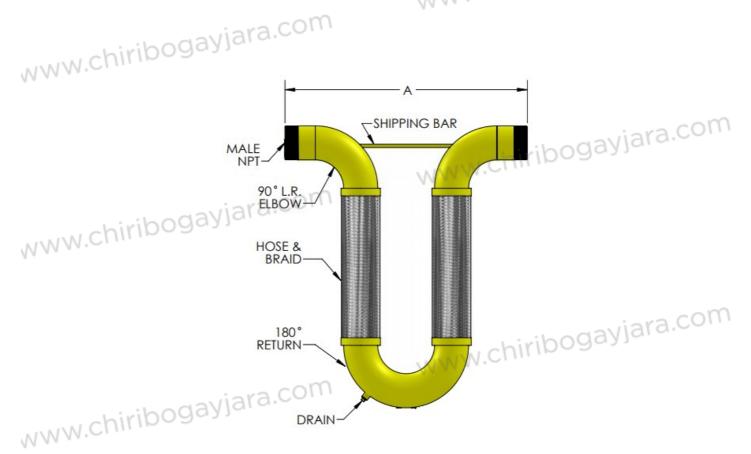

GAS & LIQUID-FUEL CH&J-U-LOOP THREAD END

END FITTINGS - CARBON STEEL - SCH 40/STD
HOSE & BRAID - STAINLESS STEEL
90 FL POW 90 ELBOW - CARBON STEEL - SCH 40/STD 180 RETURN - CARBON STEEL - SCH 40/STD

www.chiribog **Product Description**

W

The models GAS & LIQUID-FUEL CH&J-U-LOOP THREAD END are for use with flammable and combustible gases and liquids. This version of the GAS & LIQUID-FUEL CH&J-U-LOOP THREAD END are made with stainless steel hose and braid and carbon steel fittings. Stainless steel end fittings are also available. Available with Sch. 40 MPT or Sch. 40 beveled weld ends.

The primary application for the GAS & LIQUID-FUEL CH&J-U-LOOP THREAD END is installations at seismic or building joints. There are also thermal applications due to change in ambient temperature. An example of this would be a long line installed on the roof of a building.

ww.chiri	Size	MODEL#	MOVEMENT	END TO END	SINGLE BRAID PSI at 21°C]
	0.5	CH&JULG50	+/-4	15	150	•
	0.75	CH&JULG75	+/-4	16	150	

	L			
1	CH&JULG100	+/-4	16	150
1.25	CH&JULG125	+/-4	16.75	150
1.5	CH&JULG150	+/-4	17.5	150
2	CH&JULG200	+/-4	20	150
2.5	CH&JULG250	+/-4	21.5	150
bogan,	CH&JULG300	+/-4	26	150
4	CH&JULG400	+/-4	32	150

