IMPORTADORA
CHIRIBOGA
& JARA S.A.

Urb. Sta Adriana Mz 3 Sl 7, Av J.T. Marengo Km 5 1/2, Guayaquil-Ecuador
GYE: (593-4) 6005004 - (593-4) 6005005
GYE: (593-4) 3082583
www.chiribogayjara.com (http://chiribogayjara.com)




PRESSURE WASHER HOSE REEL PWHR03

Applications

Spring-driven retraction hose reel, suitable for use in expandable metal cabinets and multiple reel bank systems for pressure washer machinery applications. Maximum hose pressure rating of 5,000 PSI.

Construction

Steel construction for strength and durability solid steel axle and lubricated, adjustable arm guidereel.

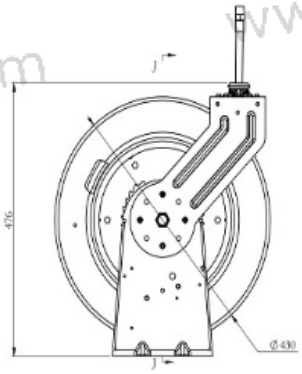

Features

- Steel Construction – Heavy duty dual supporting arms construction with corrosion resistant powder coating 48 hours salt and frog tested
- Guide Arm – Multiple guide arm positions provide versatile uses and easier field adjustment
- Non-Snag Roller – Four direction rollers reduce hose wear abrasión
- Spring guard – Protects hose from wearing, assures long hose life
- Self-Laying System – Spring powered auto rewind with 8,000 full retraction
- Easy Mounting – Base can be mounted on wall, ceiling or floor
- Adjustable Hose Stopper – Ensures the outlet hose reachable

CHYJ CODE	HOSE I.D.	HOSE TYPE	LENGTH	W.P
PWHR03-PW1220	1/2"	HIGH PRESSURE HOSE	20 M	3000 PSI

www.chiribogayjara.com