



IMPORTADORA


**CHIRIBOGA
& JARA S.A.**

Urb. Sta Adriana Mz 3 Sl 7, Av J.T. Marengo Km 5 1/2, Guayaquil-Ecuador

GYE: (593-4) 6005004 - (593-4) 6005005

GYE: (593-4) 3082583

www.chiribogayjara.com (http://chiribogayjara.com)

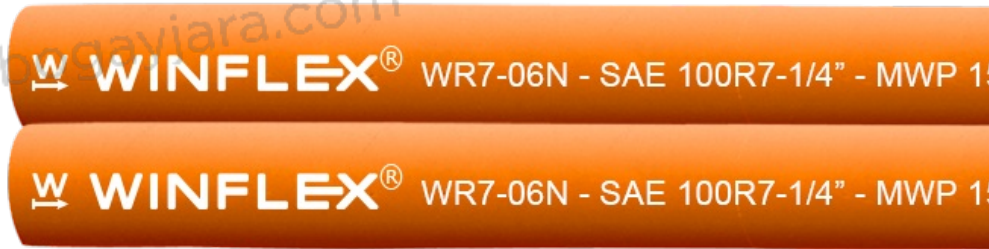

TWIN R7 (NON CONDUCTIVE)

- Tube:** Nylon 11
- Reinforcement:** One layer of synthetic fiber braid
- Cover:** Non-Conductive Polyurethane
- Application:** Compatible w/most hydraulic fluids, designed for use where electric shock hazards exist. Max leakage is 50 Micro Amperes per ft. @ 75KV per ft. for 5 minutes.
- Temperature:** -40°C to +93°C
- Safety Factor:** 4:1

I.D		WORKING PRESSURE		TEST PRESSURE		BURST PRESSURE		BEND RADIUS	WEIGHT (APPROX)
DN	INCH	BAR	PSI	BAR	PSI	BAR	PSI	mm	Kg/m
6	1/4	255	3260	510	6520	1020	13040	100	0.180
10	3/8	155	2250	310	4500	620	9000	125	0.310
13	1/2	140	2030	280	4060	560	8120	180	0.448